



# ATS22: Compact and powerful for standard applications



**Power Range:**  
4 KW- 400 KW

**Voltage Range:**  
208V- 600V, 3 Ph

**Integrated Communication:**  
Modbus Communication

**Bypass Arrangement:**  
Integrated Bypass Contactor



4 Digit Remote Display (Optional for door mounting)

[ATS22 Catalogue](#)

**Smooth Starting & Stopping:**

- True 3 Phase Control
- Voltage & Torque Control

**Save Cost & Space:**

- Optimum product sizes
- Integrated bypass contactor
- Faster wiring time
- Low Heat Dissipation
- Integrated Display



**Withstand Harsh Environment**

- Coated cards as standard

**Dual Motor Parameters**

**Protection Functions:**

- Motor Thermal Protection
- Integrated processing of the PTC thermal probe with electrical isolation
- Automatic adjustment to the line frequency
- Phase sequence detection
- Phase loss detection
- Detection of imbalances between phases and of leakage currents
- Trip History

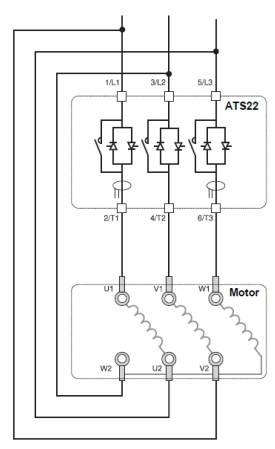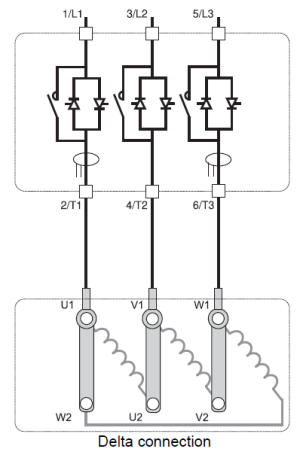

## Targeted Applications

- Centrifugal Pumps
- Piston Pumps
- Fans
- Material Handling (Conveyors etc.)
- Centrifugal Compressors
- Specialist Machinery (Agitator, Mixers, Centrifuges etc.)
- Turbine

